

QUICK START (rev 20230801)

Attach to the drone

Attach the db120 on the top of your drone:

- Use the 3M dual lock™ stickers (included).
- And/or use two M5 screws.

Use the db120

- Power on the db120.
- Wait for Status LEDs to signal *Ready for take-off*.
- You are ready to fly.

Status LEDs



Ready for take-off: slowly flashing (every 4s), location acq.



Non-compliant config: very slow flashing (every 20s), location acq.



Acquiring location

Battery level is number of LEDs on or flashing (in steps of 25%).


Charging

Charge the db120 using a USB-C charger. Charging LED turns green if fully charged.


Configuration

No configuration is required for USA. Configure operator ID for EU use.

Press configuration button (red LED is now permanently on) and connect to *dronebeacon* WLAN network. Point your browser to <http://192.168.50.1>

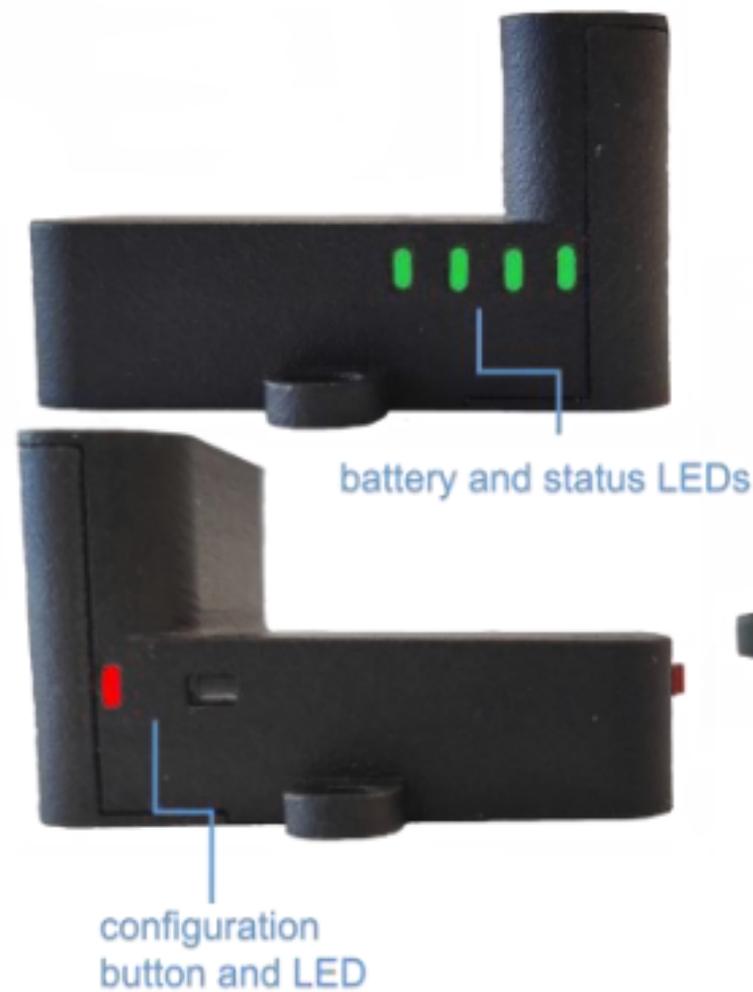

*OpenDroneID OSM
Drone Scanner
(see section 1.8 manual)*

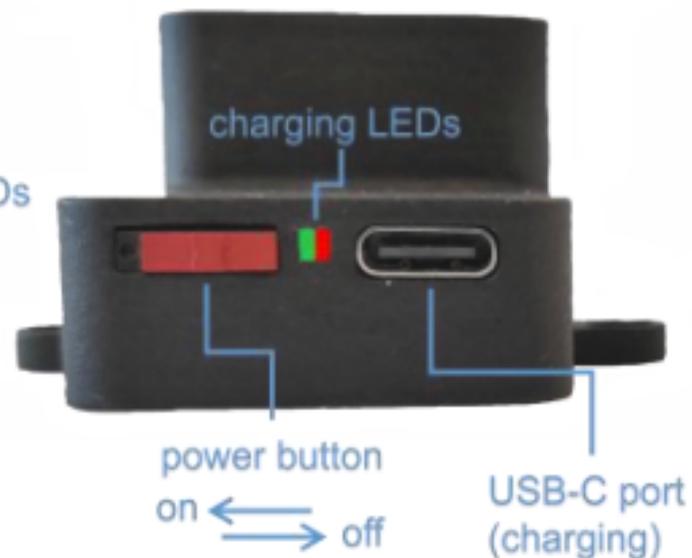

Contact

Please contact us at info@bluemark.io or by phone: +31 53 711 2104, if you need more information.



manual

<https://download.bluemark.io/db120.pdf>